


# REFLEX RUBBER STRAINER

## Advanced Flexible Dewatering and Filtration Strainer for Harsh Environments



- ✓ Use on roadways open cut and underground subject to constant water inundation
- ✓ Strong, Lightweight and flexible
- ✓ Does not corrode – long lasting
- ✓ Quick and easy to clean
- ✓ No sharp edges reducing injuries
- ✓ No steel / sharp objects submersed reducing trip and cut hazards
- ✓ Easy to use inside boreholes
- ✓ Suction Hosetail attachment

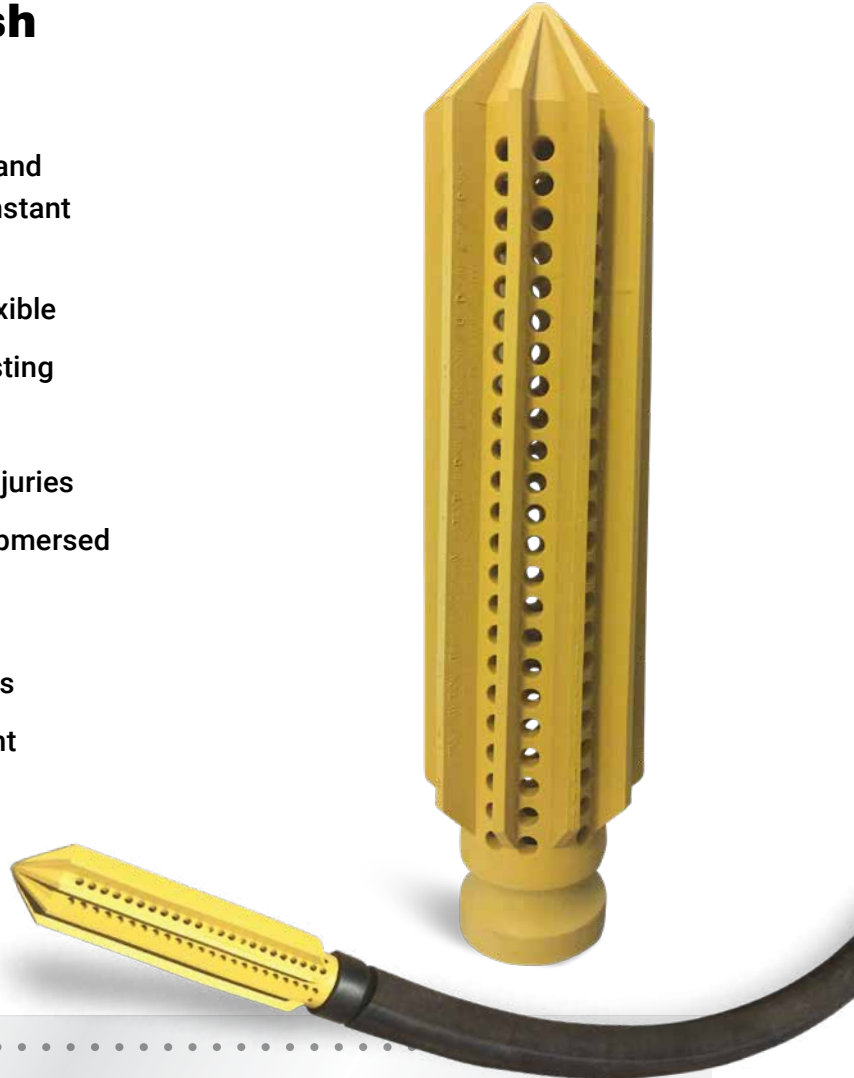

### TECHNICAL SPECIFICATIONS

Flow rate	850 litres per minute
Elongation	Safe capability 450%
Length	135mm
Width	75mm
Weight	approx. 150 g
Hardness	90 shore A
Temperature range	Safe -66 °C to 100+ °C
Size	2" (51mm) standard. Other sizes available on request. <i>Assemblies made to length as requested.</i>